VARUN ENGINEERS
HEAD OFFICE : # A-28/1, 3&4, Road No. 15, Behind GVK Bio Science,
IDA, Nacharam, Hyderabad - 500 076.
Ph: 72070 57694, 98665 01955, 98665 07955
E-mail : varunengineers@gmail.com, info@varunengineersindia.com

Quotation No : Q25000093

Date : 05-Mar-2025

Bhavishya Foods & Beverages Pvt Ltd
Sy.No: 67, Kachivanisingaram, Via Pirzadiguda, Uppal
HYDERABAD
TELANGANA
500039

Kind Attention : Mr./Ms. CP Reddy

Dear Sir,

Our team understands that selecting gas generation systems is a difficult task.
We have the expertise to help you being a prime manufacturer and supplier of gas generation systems.

Absstem has the resources, facilities, technology, and expertise required to ensure a successful project.
Our approach is low-risk because of our previous experience with large and complex projects.
Post-installation, our shield service division, with diligent accuracy and functionality, oversees a team of technicians who provide warranty and post-warranty support to your newly-installed gas generation systems.
Our customers have relied on scale up their production.

Our products have consistently delivered absolute purity requirements.
The industry's lowest ever production downtime.
Reduce OPEX by at least 70%.

We wish to form a long-term relationship with the goal to develop the most cost-effective and comprehensive solutions for your needs.
With an experienced team of professional personnel already in place, our team is prepared to move swiftly to ensure that we meet critical objectives & timelines.
Please feel free to contact in case of any query.

Looking forward for a positive response.

Thanks and Regards,

For VARUN ENGINEERS

K.Ramesh

Managing Director

9866507955




POWERED BY ABSSTEM INDUSTRIAL

Industrial

PSA Oxygen Generator



PSA Technology

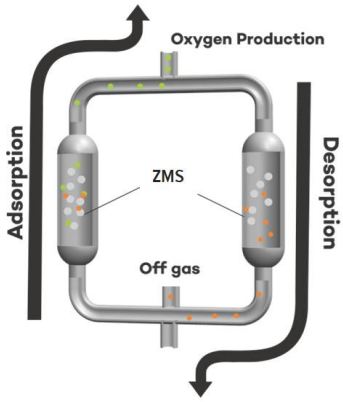

PSA Process explaining oxygen production

Industrial Oxygen Generator mainly consists of two adsorbers filled with zeolite molecular sieves. Pressurized air is passed through one of these adsorbers, zeolite having a property to attract nitrogen, adsorbs Nitrogen from air and oxygen is allowed to pass through and move into the storage tank as the final product. As the adsorber approaches saturation, the air is allowed to pass through the other adsorber while this adsorber is being regenerated to ensure a continuous supply of Oxygen. This changeover takes place through a specially designed microcontroller to ensure a hassle-free operation. The quality of oxygen produced is monitored by an Oxygen analyser.

Absstem Industrial solutions Pvt. Ltd.
Corporate Address: *Plot No. 591, Phase- IV, Sector 8, IMT Manesar, Gurugram, Haryana-122052*
Contact-1800 3010 3394, Email- Indsales@absstem.com
CIN -U29256HR2022PTC103387

Key Features

- Shipped ready for installation
- 5 minutes Startup time with uninterrupted stoppages.
- Quick & Easy installation
- Low operating costs compared to gas cylinders/liquid oxygen
- Reduced Maintenance costs
- Embedded Safety Interlocks to cater any abnormality.
- Space-saving compact design.
- Eliminates all safety hazards which are there with gas cylinder or liquid oxygen.
- 10 years warranty on molecular sieves.

Description

a. Product	Oxygen Gas Generator
b. Model	**IDOS**
c. Technology	PSA (Pressure Swing Adsorption)

Specifications

a.	Oxygen Flow Rate	As per Performance Sheet
b.	Oxygen Purity	As per Performance Sheet
c.	Oxygen Delivery Pressure	5.5 Barg (Higher Pressure Options Available)
d.	Ambient conditions	
	• Temperature	0 to 50 Deg. Celsius
	• Relative Humidity	up to 80 % (Max.)
	• Altitude	up to 1000 m above Sea level

Scheme Offered

This scheme will comprise of

- Air package
  (Air compressor, Air dryer, Air Receiver, Water Separator)
- Industrial Oxygen generator with oil removal filtration system
- Storage Tank
- Oxygen Analyzer
- Alarm panel

Unique Features of Absstem

a. All fabricated items are cleaned and degreased as per GEP standards.
b. All Instruments used are compatible with oxygen gas.
c. Guaranteed 10+ years of trouble free and reliable plant operation.
d. We provide the purest **Oxygen** in Industry.
e. Data logging and Graphical Reports for all parameters available.
f. Test certificates of all instruments are available on demand.


Absstem Industrial solutions Pvt. Ltd.
Corporate Address: *Plot No. 591, Phase- IV, Sector 8,*
IMT Manesar, Gurugram, Haryana-122052
Contact-1800 3010 3394, Email- Indsales@absstem.com
CIN -U29256HR2022PTC103387

Onsite Gas Generation vs Liquid Tank/Cylinder Alternative

Non-stop availability: 24 x 7 across 365 days in an year
Easy integration within existing installations
Your own independent supply source of industrial gas
Significant economies for scale and lower operational costs: no rental charges, logistical expenses and bulk user evaporation losses
No safety hazards related to handling high-pressure cylinders

Equipment Description

The Industrial Oxygen Generator consists of

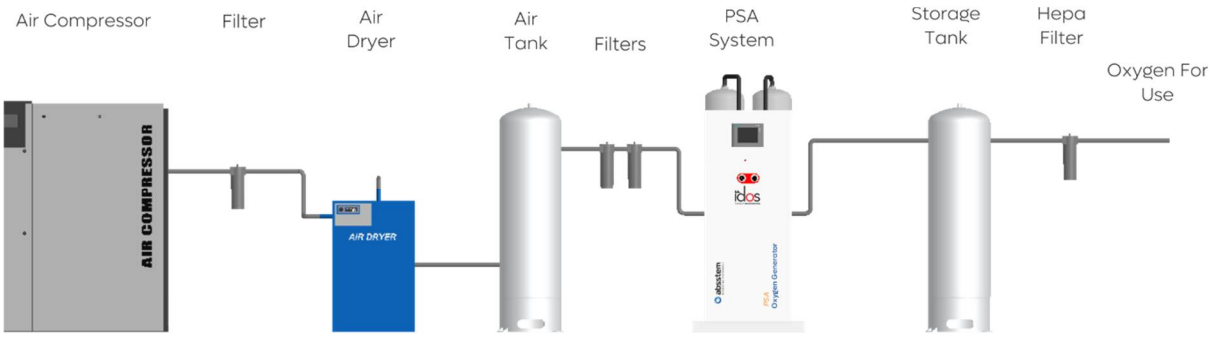

Air Compressor	An Air compressor is used to compress the atmospheric air to a pressure required for the separation of **oxygen** from the air.
Refrigerated Air Dryer	Compressed air then passes through a refrigerated dryer to remove moisture (which is harmful to sieves) from the air.
Air Receiver	Dry air is collected in an air tank to remove the pulsations which serve the dynamic (changing) requirement of air by the PSA system.
Multistage Filtration system	Before air enters the PSA system, it is passed through multistage filtration removing moisture, particulates and oil content to the specified levels.
PSA system	Pressurized air is passed through PSA Towers filled with Molecular sieves to separate **Oxygen** from Air.
Storage Tank	Industrial Grade **Oxygen** produced from IDOS is stored in this tank to supply a continuous flow of **Oxygen**.
Online Oxygen Analyzer	Online Oxygen analyzer for continuous monitoring of Oxygen purity level.


Absstem Industrial solutions Pvt. Ltd.
Corporate Address: *Plot No. 591, Phase- IV, Sector 8, IMT Manesar, Gurugram, Haryana-122052*
Contact-1800 3010 3394, Email- Indsales@absstem.com
CIN -U29256HR2022PTC103387

HD Touch Screen Display

(User-friendly touch screen interface for easy operation and maintenance)

Absstem industrial oxygen generator complies with all industry standards and regulation

- Alarm management system
- Plug and play
- Fully automatic
- Process data display
- Consumables running hours display
- Data logging via USB drive
- Graphical representation

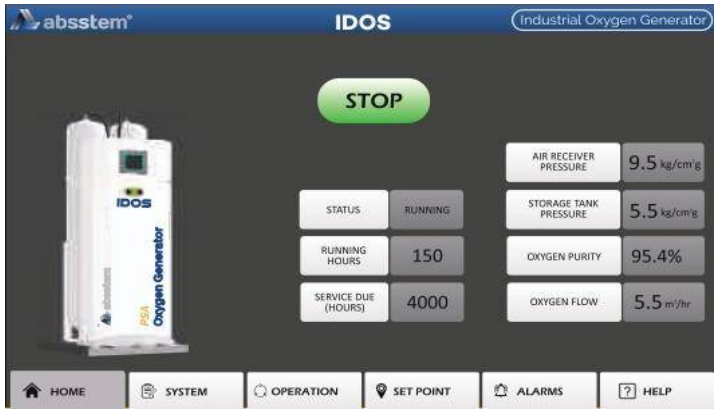

Additional upgrades

- Digital flow meter with totaliser
- High-pressure oxygen tank
- Oxygen booster for high pressure requirements
- Cylinder manifold and alarm management system
- Remote monitoring

Plant Operation

- Unit operates 24-hrs a day, 7-days a week throughout the year reliably, automatically & safely

Automation

- The Plant is fully automatic and needs only electrical power for running the Air compressor
- The machine automatically enters into standby mode when the level in the Storage Tank reaches a preset limit. This helps in optimised Air Compressor operation and reduced power consumption.

International Quality standards

A strict quality procedure, following the leading international pharmacopoeia and Industrial directives, is followed in the selection of all mechanical and electrical instruments, vessel fabrication and designing of Industrial oxygen generators.

Absstem Industrial solutions Pvt. Ltd.
Corporate Address: *Plot No. 591, Phase- IV, Sector 8, IMT Manesar, Gurugram, Haryana-122052*
Contact-1800 3010 3394, Email- Indsales@absstem.com
CIN -U29256HR2022PTC103387

Itemised Supply description

No.	Item description	Make	Qty
a	Air Compressor	Kaeser/IR/As per Demand	Client scope/ Quoted Separately
b	Refrigeration Dryer with pre filter	Kaeser/IR/As per Demand	Client scope/ Part of Compressor Package.
c	Air Tank	ABSSTEM	Client scope/ Part of Compressor Package.
d	Set of Filters	ABSSTEM	1 no.
e	PSA unit (IDOS)	ABSSTEM	1 no.
f	Electrical Power Panel with PLC and cabling	ABSSTEM & MITSUBISHI	1 no.
f	Digital Oxygen Analyzer	ABSSTEM	1 no.
g	Storage Tank	ABSSTEM	Quoted Separately.

Electrical Protection

The client should make proper arrangements for earthing/grounding systems for the Industrial **Oxygen** Generator at their facility.

Enclosure Panel

- Ergonomically designed metal enclosure with powder-coated finish for longer life.
- High-strength IP-rated panel fittings from Germany for a robust enclosure.
- Fan filters from Rittal are IP-55 rated making the electrical enclosure internal environment dust-free.
- Easy connectivity to any place of installation with req. port connections.
- High-strength base frame designed for higher load and easy transportation.
- Vessels are designed per ASME section VIII DIV I. Vessels are epoxy paint coated which is considered good for longevity and corrosion resistance.
- All electrical items are CE certified with operating voltage at 24 VDC

Maintenance Contract (AMC / CMC)

Our in-house service support packages Absstem Shield & Absstem Shield premium ensures 24*7 on site support for all scheduled and need based service requirements. Per the schedule mentioned in the operational manual, we suggest the user to change the filters by following a simple protocol.

Our technical experts are always available to guide your maintenance team for carrying out minor troubleshooting and basic maintenance activities via remote support program.

Best ROI Guaranteed

ROI within 6 to 18 months when compared to conventional methods

Generator performance depends on the component selection. Our processes make this job easier as all equipment is selected based on more than 3 decades of research. IDOS is a fully automatic (operator-free operation) that ensures peace of mind.

We deliver what we commit!!

Absstem Industrial solutions Pvt. Ltd.
Corporate Address: *Plot No. 591, Phase- IV, Sector 8, IMT Manesar, Gurugram, Haryana-122052*
Contact-1800 3010 3394, Email- Indsales@absstem.com
CIN -U29256HR2022PTC103387

VARUN ENGINEERS
HEAD OFFICE : # A-28/1, 3&4, Road No. 15, Behind GVK Bio Science,
IDA, Nacharam, Hyderabad - 500 076.
Ph: 72070 57694, 98665 01955, 98665 07955
E-mail : varunengineers@gmail.com, info@varunengineersindia.com

Product Description

Product	Description	Make	Qty
IDOS Oxygen Generator	IDOS 06 B Oxygen		1

Caption	Specification
Gas Generated	Oxygen
Flow	6.5 Nm3/Hr
Purity	95 Percent
Compressor	In Your Scope / Quoted Separately
Dryer	In Your Scope / Part of Compressor Package
Air Vessel	In Your Scope / Part of Compressor Package
Dry Air Required	53 CFM
Power Required	230V 50 Hz Single Phase
Module Option	PSA Plant Only

Product	Description	Make	Qty
IDOS Gas Storage	IDOS 06 ST Oxygen	ABSSTEM	1

Caption	Specification
Water Volume	1250 Litres
Gas Stored	Oxygen
Gas Stored Volume	6.875 M3
Working Pressure	5.5 Barg
Hydrotest Pressure	9 Barg

Commercial Offer

S No	Item Code	Item Name	Description	HSN	Qty	Unit Price	Discount	GST(%)	Amount
1	IDOS 06 B	IDOS 06 B	IDOS Oxygen Generator	842139	1	16,82,400.00	5,21,544.00	18.00	11,60,856.00
2	IDOS 06 ST	IDOS 06 ST	IDOS Gas Storage	842139	1	1,40,400.00	49,140.00	18.00	91,260.00
								Sub Total	12,52,116.00



VARUN ENGINEERS
HEAD OFFICE : # A-28/1, 3&4, Road No. 15, Behind GVK Bio Science,
IDA, Nacharam, Hyderabad - 500 076.
Ph: 72070 57694, 98665 01955, 98665 07955
E-mail : varunengineers@gmail.com, info@varunengineersindia.com

GST(%) @18.00	2,25,380.88
Grand Total	14,77,496.88

Terms And Conditions

1.	EXCLUSIONS & CLIENTS SCOPE	All erection / civil work, All Power Cables & Cabling out of battery limit of PSA Plant, Cable Trenches etc. Unloading / Shifting of Gas Plant at Clients site will be in Client Scope. Additional gas piping, cooling water (if required).
2.	SUPERVISION OF ERECTION & COMMISSIONING	There shall be no commissioning charges, however you shall arrange freeTo & Fro Air Ticket, lodging / boarding, and local conveyance for our Engineers during supervision of Installation of Gas Plant at site on free of cost basis. Our Engineers will be there for Supervision only. Any manpower / fitter required for installation work shall be provided by you.
3.	P&F	3% Extra.
4.	Freight	Extra at Actuals.
5.	Insurance	In your Scope.
6.	Payment Terms	50% Advance with your Prestegious Purchase Order and Balance against PI.
7.	Delivery	6-8 Weeks from the PO and Advance. Rest can be confirmed for Availability.
8.	Warranty	We hereby confirm that, our equipment shall have Suppliers warranty for a period of 12 months from the date of Commissioning or 18 months from date of Dispatch whichever is earlier.
9.	GST	As per the Commercial Table.
10.	Remarks	.

Hope you will find our offer in line with your requirement.
Should you require any further clarification/information, please feel free to contact us.
Thanking you, and assuring you of our best attention at all times.

Very Yours truly,
For VARUN ENGINEERS
K.Ramesh
Managing Director
9866507955

