ALTAIR
QUALITY. VALUE. INTEGRITY.

## Quotation No : Q25000033

Date : 24-Jan-2025

Super Auto Forge Private Limited
No.55/1A, Oragadam-Walajabad Road,Periyamathurapakkam,
KANCHIPURAM
TAMILNADU
631605

## Kind Attention : Mr./Ms. K. Damodharan

Dear Sir,

Our team understands that selecting gas generation systems is a difficult task.
We have the expertise to help you being a prime manufacturer and supplier of gas generation systems.

Absstem has the resources, facilities, technology, and expertise required to ensure a successful project.
Our approach is low-risk because of our previous experience with large and complex projects.
Post-installation, our shield service division, with diligent accuracy and functionality, oversees a team of technicians who provide warranty and post-warranty support to your newly-installed gas generation systems.
Our customers have relied on scale up their production.

Our products have consistently delivered absolute purity requirements.
The industry's lowest ever production downtime.
Reduce OPEX by at least 70%.

We wish to form a long-term relationship with the goal to develop the most cost-effective and comprehensive solutions for your needs.
With an experienced team of professional personnel already in place, our team is prepared to move swiftly to ensure that we meet critical objectives & timelines.
Please feel free to contact in case of any query.

Looking forward for a positive response.

Thanks and Regards,

## For ALTAIR PNEUMATICS


Kokila
Business Development
9566991444
www.altairpneumatics.com

nGEN POWERED BY ABSSTEM INDUSTRIAL

# Industrial PSA Nitrogen Generator




## PSA Technology

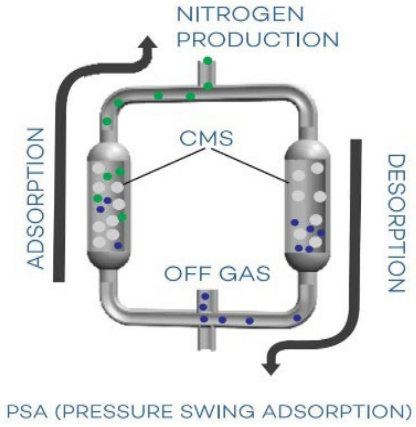


PSA (PRESSURE SWING ADSORPTION)

Industrial Nitrogen Generator mainly consists of two adsorbers filled with carbon molecular sieves. Pressurized air is passed through one of these adsorbers, carbon having the property to attract oxygen, adsorbs oxygen from air and Nitrogen is allowed to pass through and move into the storage tank as the final product. As the adsorber approaches saturation, the air is allowed to pass through the other adsorber while this adsorber is being regenerated to ensure a continuous supply of Nitrogen. This changeover takes place through a specially designed microcontroller to ensure a hassle-free operation. The quality of Nitrogen produced is monitored by a Nitrogen analyser.

## Key Features

- Shipped ready for installation
- 5 minutes to run and never have to stop it!
- Easy installation
- Low operating expenses compared to gas cylinders/liquid Nitrogen
- Maintenance costs are very less
- Embedded Safety Interlocks
- Space-saving design
- Eliminates all hazards which are there with gas cylinder or liquid Nitrogen
- Longevity: at least 10 years

**Absstem Industrial Solutions Pvt. Ltd.**
Plot No. 591, Sector 8, Phase IV
IMT Manesar, Gurugram, Haryana - 122051
Contact - 1800 3010 3394 Email - indsales@absstem.com
CIN: U29256HR2022PTC103387

## Description

| | | |
|---|---|---|
| a. | Product Name | Nitrogen Gas Generator |
| b. | Model Range | **NGEN** |
| | Technology | PSA (Pressure Swing Adsorption) |

## Specifications

| | | |
|---|---|---|
| **a.** | Nitrogen Flow Rate | As per Performance Sheet |
| **b.** | Nitrogen Purity | As per Performance Sheet |
| **c.** | Nitrogen Delivery Pressure | 5.5 Barg (Higher Pressure Options Available) |
| **d.** | Ambient conditions | |
| | Temperature | 0 to 50 Deg. Celsius |
| | Relative Humidity | up to 80 % (Max.) |
| | Altitude | up to 1000 m above Sea level |

## Scheme Offered – (PSA Only)

This scheme will comprise of

- Air package with inlet air filtration system
  (Air compressor, Air dryer, Water Separator, Oil filters)
- Industrial Nitrogen generator
- Storage Tank
- Nitrogen Analyzer
- Alarm panel

## Unique Features of Absstem

a. All the fabricated items are cleaned and degreased following our strict quality policy.
b. All the Instruments are specially manufactured to make them suitable for Nitrogen gas.
c. Guaranteed 10+ years of healthy life.
d. We provide the purest **Nitrogen** in Industry.
e. Data logging and Graphical Reports for all parameters available.
f. Test certificates of all instruments are available on demand.

## **Onsite Gas Generation** vs Liquid Tank/Cylinder Alternative


| |
|---|
| *Non-stop availability: 24 hours a day, 7 days a week* |
| *Easy integration within existing installations* |
| *Your own independent supply of industrial gas* |
| *Significant economies for scale and lower operational costs: no rental charges, logistical expenses and bulk user evaporation losses* |
| *No safety hazards when handling high-pressure cylinders* |



**Absstem Industrial Solutions Pvt. Ltd.**
Plot No. 591, Sector 8, Phase IV
IMT Manesar, Gurugram, Haryana - 122051
Contact - 1800 3010 3394 Email - indsales@absstem.com
CIN: U29256HR2022PTC103387

## Equipment Description

The Industrial Nitrogen Generator consists of

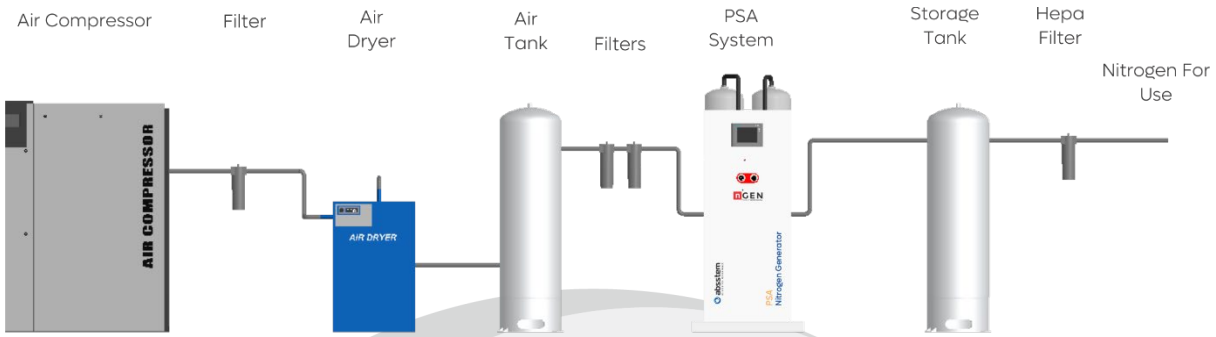


| | |
|---|---|
| Air Compressor | An Air compressor is used to compress the atmospheric air to a pressure required for the separation of **Nitrogen** from the air. |
| Refrigeration dryer | Compressed air then passes through a refrigerated dryer to remove moisture (which is harmful to sieves) from the air. |
| Air Tank | Dry air is collected in an air tank to remove the pulsations which serve the dynamic (changing) requirement of air by the PSA system. |
| Multistage Filtration system | Before air enters the PSA system, it is passed through multistage filtration removing moisture, particulates and oil content to the specified levels. |
| PSA system | Pressurized air is passed through PSA Towers filled with Molecular sieves to separate **Nitrogen** from Air. |
| Storage Tank | Industrial Grade **Nitrogen** produced from NGEN is stored in this tank to supply a continuous flow of **Nitrogen**. |
| Nitrogen Analyzer | Nitrogen produced is monitored by a **Nitrogen** analyser. In case, O2 purity goes below the specified level, it gives an alarm and switches it to vent mode. |

## HD Touch Screen Display

(User-friendly touchscreen interface for easy operation and maintenance)

Absstem industrial Nitrogen generator complies with all industry standards and regulation

- Alarm management system
- Plug and play
- Fully automatic
- Process data display
- Consumables running hours display
- Data logging via USB drive
- Graphical representation




**Absstem Industrial Solutions Pvt. Ltd.**
Plot No. 591, Sector 8, Phase IV
IMT Manesar, Gurugram, Haryana - 122051
Contact - 1800 3010 3394 Email - indsales@absstem.com
CIN: U29256HR2022PTC103387

## Additional upgrades

- Digital flow meter with totaliser
- High-pressure Nitrogen tank
- Cylinder manifold and alarm management system
- Remote monitoring

## Plant Operation

- Unit operates 24-hrs a day, 7-days a week reliably, automatically & safely

## Automation

- The Plant is fully automatic and needs only electrical power for running the Air compressor
- The machine automatically enters into standby mode when the level in the Storage Tank reaches its set limit. This helps to increase the life of the Air compressor.

## International Quality standards

A strict quality procedure, following the leading international pharmacopoeia and Industrial directives, is followed in the selection of all mechanical and electrical instruments, vessel fabrication and designing of Industrial Nitrogen generators.

## Itemised Supply Description

| No. | Item description | Make | Qty |
|---|---|---|---|
| a | Air Compressor with Filters | ABSSTEM APPROVED | Quoted Separately |
| b | Refrigeration Dryer | ABSSTEM APPROVED | Quoted Separately |
| c | Air Tank | ABSSTEM | Quoted Separately |
| d | Set of Filters | ABSSTEM | 1 no. |
| e | PSA unit (NGEN) | ABSSTEM | 1 no. |
| f | Electrical Power Panel with PLC and all cabling | ABSSTEM & MITSUBISHI | 1 no. |
| f | Digital Nitrogen Analyzer | ABSSTEM | 1 no. |
| g | Storage Tank | ABSSTEM | Quoted Separately |
| h | Outlet product gas Filter | ABSSTEM | 1 no. |



**Absstem Industrial Solutions Pvt. Ltd.**
Plot No. 591, Sector 8, Phase IV
IMT Manesar, Gurugram, Haryana - 122051
Contact - 1800 3010 3394 Email - indsales@absstem.com
CIN: U29256HR2022PTC103387

## Electrical Protection

The client should make proper arrangements for earthing/grounding systems for the Industrial **Nitrogen** Generator at their facility.

## Enclosure Panel

- Ergonomically designed metal enclosure with powder-coated finish for longer life.
- High-strength IP-rated panel fittings from Germany for a robust enclosure.
- Fan filters from **Rittal** are IP-55 rated making the electrical enclosure's internal environment dust-free.
- Easy connectivity to any place of installation with req. port connections.
- High-strength base frame designed for higher load and easy transportation.
- Vessels are designed per ASME section VIII DIV I. Vessels are epoxy paint coated which is considered good for longevity and corrosion resistance.
- All electrical items are CE certified with operating voltage at 24 VDC

## Annual Maintenance Contract (AMC)

Our in-house support Absstem shield is 24*7 open and we assure a timely service maintenance schedule. Per the schedule mentioned in the operational manual, we suggest the operator change the filters by following a simple protocol.

It is very easy to change or replace as our commissioning engineer plus our commissioning engineer and tech support office will always guide you about the activity.

## Best ROI Guaranteed

***ROI within 6 to 18 months when compared to conventional methods***

Generator performance depends on the component selection. Our processes make this job easier as all equipment is selected based on more than 3 decades of research. NGEN is a fully automatic (operator-free operation) that ensures peace of mind.

# We deliver what we commit!!

Thank You



**Absstem Industrial Solutions Pvt. Ltd.**
Plot No. 591, Sector 8, Phase IV
IMT Manesar, Gurugram, Haryana - 122051
Contact - 1800 3010 3394 Email - indsales@absstem.com
CIN: U29256HR2022PTC103387

ALTAIR
QUALITY. VALUE. INTEGRITY.

## Product Description

| Product | Description | Make | Qty |
|---|---|---|---|
| nGen Nitrogen Generator | nGEN 100 P<br>Nitrogen | | 1 |

| Caption | Specification |
|---|---|
| Gas Generated | Nitrogen |
| Gas Pressure | upto 6.5 Barg( Higher options Available) |
| Flow @ 99.99 % | 142 Nm3/hr |
| Flow @ 99.995 % | 107 Nm3/hr |
| Flow @ 99.999 % | 80 Nm3/hr |
| Flow @ 99.9995 % | 64 Nm3/hr |
| Compressed Air Requirement | 520 CFM |
| Module | High Purity PSA system Only |
| Air Compressor And Drier | In your Scope / Quoted Separately |

## Commercial Offer

| S No | Item Code | Item Name | Description | HSN | Qty | Unit Price | GST(%) | Amount |
|---|---|---|---|---|---|---|---|---|
| 1 | nGEN 100 P | nGEN 100 P | nGen Nitrogen Generator | 840510 | 1 | 43,47,600.00 | 18.00 | 43,47,600.00 |

| | |
|---|---|
| Sub Total | 43,47,600.00 |
| GST(%) @18.00 | 7,82,568.00 |
| Grand Total | 51,30,168.00 |

FACTORY ADDRESS
Altair Pneumatics
No. 3/3, (3/142), Ramapuram Road, Sathya Nagar, Manapakkam, Chennai - 600 089.
OFFICE ADDRESS
No. 5/848, 2nd Floor, Aradhana Castle, 5th Block, Mogappair West, Chennai - 600 037.
info@thealtair.in | www.thealtair.in | +91 44 4558 3550

ALTAIR
QUALITY. VALUE. INTEGRITY.

# Terms And Conditions

| | | |
|---|---|---|
| 1. | EXCLUSIONS & CLIENTS SCOPE | All erection / civil work, All Power Cables & Cabling out of battery limit of PSA Plant, Cable Trenches etc. Unloading / Shifting of Gas Plant at Clients site will be in Client Scope. Additional gas piping, cooling water (if required). |
| 2. | P&F | 3% Extra. |
| 3. | Freight | Extra at Actuals. |
| 4. | Insurance | In your Scope. |
| 5. | Payment Terms | 50% Advance with your Prestegious Purchase Order and Balance against PI. |
| 6. | GST | As per the Commercial Table. |
| 7. | Remarks | . |
| 8. | SUPERVISION OF ERECTION & COMMISSIONING | There shall be no commissioning charges, however you shall arrange freeTo & Fro Air Ticket, lodging / boarding, and local conveyance for our Engineers during supervision of Installation of Gas Plant at site on free of cost basis. Our Engineers will be there for Supervision only. Any manpower / fitter required for installation work shall be provided by you. |
| 9. | Delivery | 6-8 Weeks from the PO and Advance. Rest can be confirmed for Availability. |
| 10. | Warranty | We hereby confirm that, our equipment shall have Suppliers warranty for a period of 12 months from the date of Commissioning or 18 months from date of Dispatch whichever is earlier. |

Hope you will find our offer in line with your requirement.

Should you require any further clarification/information, please feel free to contact us.

Thanking you, and assuring you of our best attention at all times.

Very Yours truly,

For ALTAIR PNEUMATICS
Kokila
Business Development
9566991444
www.altairpneumatics.com