Assam Bearing Private Limited
2423 Surekha Building, Shardhanand marg, Delhi-110006
GSTN-07AADCA3768K1ZF
www.Assambearing.in
Ph: +91-9350193013, Email: Delhi@assambearing.com

Quotation No : Q25000075

Date : 25-Feb-2025

Dolfin Rubber
Village Gaunspur,Hambran Road
LUDHIANA
PUNJAB
141102

Kind Attention : Mr./Ms. Harsimran Singh

Dear Sir,
Greetings from Assam Bearing

We are Authorized Distributors of SKF Bearings, Red Lion, Lincoln Lubrication Systems, Fuchs Lubricants & Absstem Industrial Solutions.

We are dealing with various industrial products such as:
-Bearings, Greases, Chain, Sprockets, Pulleys, V-Belts, Oil seals
-Lubrication Systems
-Condition Monitoring, Energy Monitoring Solutions, IIoT Solutions
-Industrial Lubricants
-Nitrogen & Oxygen Air Generator

Our team understands that selecting gas generation systems is a difficult task.

We have the expertise to help you, being a prime Distributor and supplier of Absstem gas generation systems.

Absstem has the resources, facilities, technology, and expertise required to ensure a successful project.

Post-installation, their shield service division, with diligent accuracy and functionality, oversees a team of technicians who provide warranty and post-warranty support to your newly installed gas generation systems.
Our products have consistently delivered absolute purity requirements.
The industry ﷺs lowest ever production downtime.

Reduce OPEX by at least 70 %
We wish to form a long-term relationship with the goal of developing the most cost effective and comprehensive solutions for your needs and are thus submitting our offer along with ROI calculation from our side, hope you will find our offer in accordance with your requirements & will be more than happy to serve your requirements, please call us for any queries.

For Assam Bearing Pvt Ltd.

Shray Saboo

Director


9350193012

nGEN POWERED BY ABSSTEM INDUSTRIAL

Industrial PSA Nitrogen Generator



PSA Technology

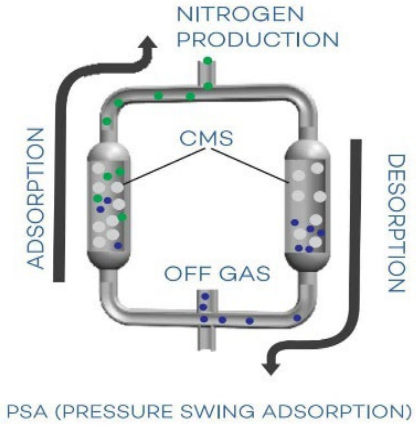

PSA (PRESSURE SWING ADSORPTION)

Industrial Nitrogen Generator mainly consists of two adsorbers filled with carbon molecular sieves. Pressurized air is passed through one of these adsorbers, carbon having the property to attract oxygen, adsorbs oxygen from air and Nitrogen is allowed to pass through and move into the storage tank as the final product. As the adsorber approaches saturation, the air is allowed to pass through the other adsorber while this adsorber is being regenerated to ensure a continuous supply of Nitrogen. This changeover takes place through a specially designed microcontroller to ensure a hassle-free operation. The quality of Nitrogen produced is monitored by a Nitrogen analyser.

Key Features

- Shipped ready for installation
- 5 minutes to run and never have to stop it!
- Easy installation
- Low operating expenses compared to gas cylinders/liquid Nitrogen
- Maintenance costs are very less
- Embedded Safety Interlocks
- Space-saving design
- Eliminates all hazards which are there with gas cylinder or liquid Nitrogen
- Longevity: at least 10 years

Absstem Industrial Solutions Pvt. Ltd.
Plot No. 591, Sector 8, Phase IV
IMT Manesar, Gurugram, Haryana - 122051
Contact - 1800 3010 3394 Email - indsales@absstem.com
CIN: U29256HR2022PTC103387

Description

a.	Product Name	Nitrogen Gas Generator
b.	Model Range	**NGEN**
	Technology	PSA (Pressure Swing Adsorption)

Specifications

a.	Nitrogen Flow Rate	As per Performance Sheet
b.	Nitrogen Purity	As per Performance Sheet
c.	Nitrogen Delivery Pressure	5.5 Barg (Higher Pressure Options Available)
d.	Ambient conditions	
	Temperature	0 to 50 Deg. Celsius
	Relative Humidity	up to 80 % (Max.)
	Altitude	up to 1000 m above Sea level

Scheme Offered – (PSA Only)

This scheme will comprise of

- Air package with inlet air filtration system
  (Air compressor, Air dryer, Water Separator, Oil filters)
- Industrial Nitrogen generator
- Storage Tank
- Nitrogen Analyzer
- Alarm panel

Unique Features of Absstem

a. All the fabricated items are cleaned and degreased following our strict quality policy.
b. All the Instruments are specially manufactured to make them suitable for Nitrogen gas.
c. Guaranteed 10+ years of healthy life.
d. We provide the purest **Nitrogen** in Industry.
e. Data logging and Graphical Reports for all parameters available.
f. Test certificates of all instruments are available on demand.


Onsite Gas Generation vs Liquid Tank/Cylinder Alternative

Non-stop availability: 24 hours a day, 7 days a week
Easy integration within existing installations
Your own independent supply of industrial gas
Significant economies for scale and lower operational costs: no rental charges, logistical expenses and bulk user evaporation losses
No safety hazards when handling high-pressure cylinders

Absstem Industrial Solutions Pvt. Ltd.
Plot No. 591, Sector 8, Phase IV
IMT Manesar, Gurugram, Haryana - 122051
Contact - 1800 3010 3394 Email - indsales@absstem.com
CIN: U29256HR2022PTC103387

Equipment Description

The Industrial Nitrogen Generator consists of

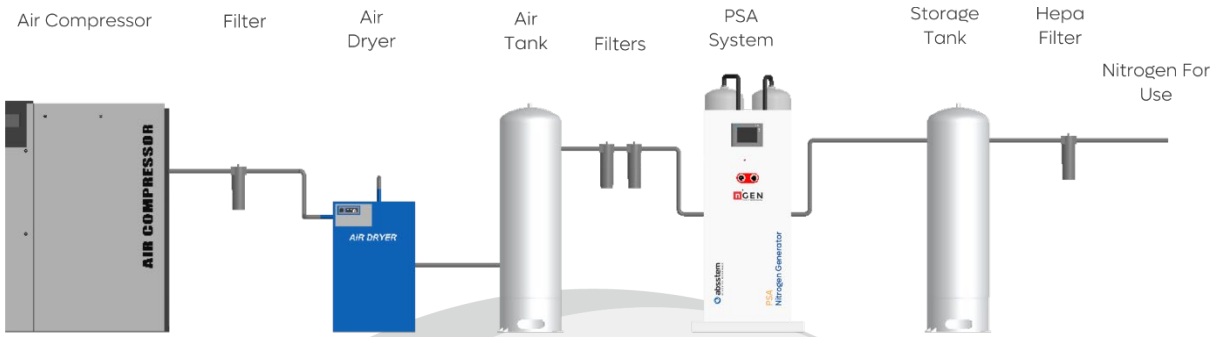

Air Compressor	An Air compressor is used to compress the atmospheric air to a pressure required for the separation of **Nitrogen** from the air.
Refrigeration dryer	Compressed air then passes through a refrigerated dryer to remove moisture (which is harmful to sieves) from the air.
Air Tank	Dry air is collected in an air tank to remove the pulsations which serve the dynamic (changing) requirement of air by the PSA system.
Multistage Filtration system	Before air enters the PSA system, it is passed through multistage filtration removing moisture, particulates and oil content to the specified levels.
PSA system	Pressurized air is passed through PSA Towers filled with Molecular sieves to separate **Nitrogen** from Air.
Storage Tank	Industrial Grade **Nitrogen** produced from NGEN is stored in this tank to supply a continuous flow of **Nitrogen**.
Nitrogen Analyzer	Nitrogen produced is monitored by a **Nitrogen** analyser. In case, O2 purity goes below the specified level, it gives an alarm and switches it to vent mode.

HD Touch Screen Display

(User-friendly touchscreen interface for easy operation and maintenance)

Absstem industrial Nitrogen generator complies with all industry standards and regulation

- Alarm management system
- Plug and play
- Fully automatic
- Process data display
- Consumables running hours display
- Data logging via USB drive
- Graphical representation



Absstem Industrial Solutions Pvt. Ltd.
Plot No. 591, Sector 8, Phase IV
IMT Manesar, Gurugram, Haryana - 122051
Contact - 1800 3010 3394 Email - indsales@absstem.com
CIN: U29256HR2022PTC103387

Additional upgrades

- Digital flow meter with totaliser
- High-pressure Nitrogen tank
- Cylinder manifold and alarm management system
- Remote monitoring

Plant Operation

- Unit operates 24-hrs a day, 7-days a week reliably, automatically & safely

Automation

- The Plant is fully automatic and needs only electrical power for running the Air compressor
- The machine automatically enters into standby mode when the level in the Storage Tank reaches its set limit. This helps to increase the life of the Air compressor.

International Quality standards

A strict quality procedure, following the leading international pharmacopoeia and Industrial directives, is followed in the selection of all mechanical and electrical instruments, vessel fabrication and designing of Industrial Nitrogen generators.

Itemised Supply Description

No.	Item description	Make	Qty
a	Air Compressor with Filters	ABSSTEM APPROVED	Quoted Separately
b	Refrigeration Dryer	ABSSTEM APPROVED	Quoted Separately
c	Air Tank	ABSSTEM	Quoted Separately
d	Set of Filters	ABSSTEM	1 no.
e	PSA unit (NGEN)	ABSSTEM	1 no.
f	Electrical Power Panel with PLC and all cabling	ABSSTEM & MITSUBISHI	1 no.
f	Digital Nitrogen Analyzer	ABSSTEM	1 no.
g	Storage Tank	ABSSTEM	Quoted Separately
h	Outlet product gas Filter	ABSSTEM	1 no.

Absstem Industrial Solutions Pvt. Ltd.
Plot No. 591, Sector 8, Phase IV
IMT Manesar, Gurugram, Haryana - 122051
Contact - 1800 3010 3394 Email - indsales@absstem.com
CIN: U29256HR2022PTC103387

Electrical Protection

The client should make proper arrangements for earthing/grounding systems for the Industrial **Nitrogen** Generator at their facility.

Enclosure Panel

- Ergonomically designed metal enclosure with powder-coated finish for longer life.
- High-strength IP-rated panel fittings from Germany for a robust enclosure.
- Fan filters from **Rittal** are IP-55 rated making the electrical enclosure's internal environment dust-free.
- Easy connectivity to any place of installation with req. port connections.
- High-strength base frame designed for higher load and easy transportation.
- Vessels are designed per ASME section VIII DIV I. Vessels are epoxy paint coated which is considered good for longevity and corrosion resistance.
- All electrical items are CE certified with operating voltage at 24 VDC

Annual Maintenance Contract (AMC)

Our in-house support Absstem shield is 24*7 open and we assure a timely service maintenance schedule. Per the schedule mentioned in the operational manual, we suggest the operator change the filters by following a simple protocol.

It is very easy to change or replace as our commissioning engineer plus our commissioning engineer and tech support office will always guide you about the activity.

Best ROI Guaranteed

ROI within 6 to 18 months when compared to conventional methods

Generator performance depends on the component selection. Our processes make this job easier as all equipment is selected based on more than 3 decades of research. NGEN is a fully automatic (operator-free operation) that ensures peace of mind.

We deliver what we commit!!

Thank You

Absstem Industrial Solutions Pvt. Ltd.
Plot No. 591, Sector 8, Phase IV
IMT Manesar, Gurugram, Haryana - 122051
Contact - 1800 3010 3394 Email - indsales@absstem.com
CIN: U29256HR2022PTC103387

Absstem Shield:

Premium Service Across India



Absstem Technologies, a leading gas technology provider and industrial and medical gas generator manufacturer has come up with a new initiative called **Absstem Shield**, under which Annual Maintenance Contracts (AMC) and Comprehensive Maintenance Contracts (CMC) will be offered for oxygen generators. Our Service Plans keep your nitrogen and oxygen generators in excellent shape.

Key Features

- Our AMC/CMC solutions work with **ANY** brand **PSA/VPSA Oxygen & Nitrogen** Generators
- We offer **on-site checkups** for your machines to access and understand your machine's requirement
- **CMC solutions** that look after your machines for as long as **10 years and beyond**
- **24 x 7** access to spare parts
- Quickest TAT (Turnaround time) in the industry.
- Constant touch of our team with your operator on **monthly** basis, ensuring highest uptime in the industry.
- Genuine spares with 6-month warranty
- We provide constant **monitoring** along with **monthly status updates**

Absstem Shield

Our in-house technical shield engineers are in constant contact with the operators every month making sure that the purity levels and output efficiencies are consistent with the requirement you've asked for. Our AMC plans work with ANY brand and either PSA or VPSA oxygen generators and PSA nitrogen generators. We make sure that every service during the AMC period is free-of-charge. If there is a need for part replacement, the only cost you would incur would be that of the spares. AMCs are open 24*7 and assure a timely service maintenance schedule. Our plans include AMCs that include constant monitoring, monthly status updates, on-site visits and one of the quickest turn-around times in the country.

Absstem Shield Premium

Our Comprehensive contracts include anything and everything that your gas generators would require to make sure the output and purity levels are consistent. The CMC plans work with ANY brand and include monthly routine check-ups, on-site deployment of our technical shield engineers, and replacement of consumables at no additional cost. As mentioned before, our CMC plans are open 24x7.

Corporate Address
Plot No. 591, Sector 8, Phase IV
IMT Manesar, Gurugram, Haryana - 122051
Work Address: Plot No. 222 & 223 Industrial Area
Puth Khurd, New Delhi, Delhi - 110039
Contact: 1800 3010 3394

Features	Shield	Shield Premium
Visit	✓	✓
Consumables	✗	✓
Flexible Payment Options	✓	✓
Genuine Parts	✓	✓
OTR (One-time Resolution)	✓	✓
Service History	✓	✓
24x7 Support	✓	✓
Training	✓	✓
Our Warranty on OEM equipment	✗	✓
Priority Status	✗	✓
Breakdown Visits	Limited	Unlimited
10-year warranty on Sieves	✓	✓

Terms And Conditions

- ### Our Responsibility

  - Check installation and ambient conditions.
  - Maintenance by service engineer based on checklist
  - Documentation of the maintenance results
  - Scheduling the maintenance dates.

- ### Client Responsibility

  - Repair and Maintenance carried out under this contract do not release the user from the prescribed operator level preventive control routines described in the service manual.
  - It is the user's responsibility to make the PSA plant available for preventive maintenance to Absstem Service Engineer on his scheduled visit. Otherwise, such a visit will be charged.
  - The suggestions/recommendations given by our service engineers from time to time on the operation of the PSA Gas Plant shall be implemented by the user.
  - It is the user's responsibility to arrange for inspection/maintenance/repair/ spare part of main incoming power, oxygen or nitrogen pipeline leakages or any other equipment beyond PSA Gas Plant maintained by supplier.

Corporate Address
Plot No. 591, Sector 8, Phase IV
IMT Manesar, Gurugram, Haryana - 122051
Work Address: Plot No. 222 & 223 Industrial Area
Puth Khurd, New Delhi, Delhi - 110039
Contact: 1800 3010 3394

- Conditions:

  - The Service contract does not apply to any damage caused due to mishandling, neglect, accident, improper application and any repair or maintenance done by an unauthorized person.
  - We are not liable for any damages arising from improper use of the equipment, or failure to follow adequate safety precautions.
  - Proper cleaning of the Air Compressor and PSA Gas Generator should be done as per the maintenance schedule provided to Client. If any damage or operation of equipment is affected due to not following the preventive maintenance schedule given to the Client.
  - Proper/continuous (without fluctuation) incoming power should be provided by the Client. Any equipment damaged due to power fluctuation is not covered under this contract.
  - Separate earthing for PSA Gas Plant and pipeline should be provided by the Hospital. If any equipment is damaged due to the non-availability of separate earthing would not be covered under CMC.
  - The Client should arrange for at least 48 hours of Gas backup after reporting the problem.
  - The service contract for PSA Gas Generators should not be broken under any condition. If the service contract is broken by the user, then the next contract would be made after inspection of the PSA Gas Generator (Chargeable). Any spares or maintenance required before the continuation of the maintenance contract should be done at extra costs if required and would be the sole decision of supplier. We are offering you service contract with an increment of 7% every year.
  - If any maintenance/repair of the PSA Gas Generator is done by an unauthorized person, Service Contract would be void with immediate effect. And another Contract needs to be done after inspection of the machine (chargeable) and it would be sole decision of supplier.
  - Any equipment not covered under contract but is a part of PSA Gas Generator, the supplier is not liable for any services however if required on sole discretion of supplier it can be done on chargeable basis.
  - 10 years warranty on sieves is only applicable if the equipment is covered under Absstem premium and Absstem Shield (recommended consumables are changed as per the schedule given by supplier).
  - Any damages incurred in major equipment due to shot circuit and malfunction are not covered such as motors, electricals and electronics etc.

A world-standard plan, with pan-India service.

Thank You

Corporate Address
Plot No. 591, Sector 8, Phase IV
IMT Manesar, Gurugram, Haryana - 122051
Work Address: Plot No. 222 & 223 Industrial Area
Puth Khurd, New Delhi, Delhi - 110039
Contact: 1800 3010 3394

Assam Bearing Private Limited
2423 Surekha Building, Shardhanand marg, Delhi-110006
GSTN-07AADCA3768K1ZF
www.Assambearing.in
Ph: +91-9350193013, Email: Delhi@assambearing.com

www.assambearing.in

Product Description

Product	Description	Make	Qty
nGen Air Package	nGEN 110 CP Nitrogen		4

Caption	Specification
Air Compressor KW	90 KW
Air Compressor Make	Atlas Copco/ Ingersoll Rand/ Gardner Denver/ As per Demand
Air Dryer	Included
Dry Air Storage	Included
Interconnecting Piping	Included
Pre filter	Included
Dry Air Generated	602 CFM

Product	Description	Make	Qty
nGen Nitrogen Generator	nGEN 110 P Nitrogen		3

Caption	Specification
Gas Generated	Nitrogen
Gas Pressure	upto 6.5 Barg(Higher options Available)
Flow @ 99.99 %	165 Nm3/hr
Flow @ 99.995 %	124 Nm3/hr
Flow @ 99.999 %	93 Nm3/hr
Flow @ 99.9995 %	75 Nm3/hr
Compressed Air Requirement	602 CFM
Module	High Purity PSA system Only
Air Compressor And Drier	In your Scope / Quoted Separately

Assam Bearing Private Limited
2423 Surekha Building, Shardhanand marg, Delhi-110006
GSTN-07AADCA3768K1ZF
www.Assambearing.in
Ph: +91-9350193013, Email: Delhi@assambearing.com

Product	Description	Make	Qty
nGen Gas Storage	nGEN 85 / 90 ST Nitrogen		3

Caption	Specification
Water Volume	10000 Liters
Gas Stored	Nitrogen
Gas Stored Volume	65 M3
Working Pressure	6.5 Barg
Hydrotest Pressure	9 Barg

Product	Description	Make	Qty
Lubricated Booster	IR-15T2X20 Booster	ABSSTEM	6

Caption	Specification
Gas to be compressed	Nitrogen
Suction Pressure	3 to 4 Barg
Discharge pressure	8 to 70 Barg
Motor rating	15 KW
Voltage	415 V AC
Gas Flow	51 to 62 NM3/hr
Type	Air Cooled Lubricated Reciprocating Booster

Product	Description	Make	Qty
HP Storage Tank 40 Barg	10000 ltr HP Storage Tank 40 Barg High Pressure Storage Tank	ABSSTEM	1

Caption	Specification
Capacity	10000 litres
Working Pressure	40 Barg
Hydrotest Pressure	66 Barg
Shell / Dish Thickness	32 mm / 34 mm
In / Out Connection	100 NB
Design Standard	IS 2825

Assam Bearing Private Limited
2423 Surekha Building, Shardhanand marg, Delhi-110006
GSTN-07AADCA3768K1ZF
www.Assambearing.in
Ph: +91-9350193013, Email: Delhi@assambearing.com

Product	Description	Make	Qty
Service	Absstem Shield Premium-nGEN 110 P Absstem Shield	ABSSTEM	3

Caption	Specification
Gas Generated	Nitrogen
Module Option	PSA plant Full Package
Make of Gas Generator	Absstem
Model of Gas Generator	nGEN 110 P
Number of Visits	4 Preventive + Unlimited Breakdown
Duration	1 year
Consumables	Included

Commercial Offer

S No	Item Code	Item Name	Description	HSN	Qty	Unit Price	GST(%)	Amount
1	nGEN 110 CP	nGEN 110 CP	nGen Air Package	840510	4	40,20,000.00	18.00	1,60,80,000.00
2	nGEN 110 P	nGEN 110 P	nGen Nitrogen Generator	840510	3	53,82,000.00	18.00	1,61,46,000.00
3	nGEN 90 ST	nGEN 85 / 90 ST	nGen Gas Storage	840510	3	8,64,000.00	18.00	25,92,000.00
4	IR-15T2X20	IR-15T2X20	Lubricated Booster	8414	6	7,80,000.00	18.00	46,80,000.00
5	HPS14	10000 ltr HP Storage Tank 40 Barg	HP Storage Tank 40 Barg	73110090	1	22,68,000.00	18.00	22,68,000.00
6	ASP-nGEN 110 P	Absstem Shield Premium-nGEN 110 P	Service	998719	3	6,20,481.60	18.00	18,61,444.80

Sub Total	4,36,27,444.80
GST(%) @18.00	78,52,940.06
Grand Total	5,14,80,384.86

Assam Bearing Private Limited
2423 Surekha Building, Shardhanand marg, Delhi-110006
GSTN-07AADCA3768K1ZF
www.Assambearing.in
Ph: +91-9350193013, Email: Delhi@assambearing.com

Terms And Conditions

1.	EXCLUSIONS & CLIENTS SCOPE	All erection / civil work, All Power Cables & Cabling out of battery limit of PSA Plant, Cable Trenches etc. Unloading / Shifting of Gas Plant at Clients site will be in Client Scope. Additional gas piping, cooling water (if required).
2.	SUPERVISION OF ERECTION & COMMISSIONING	There shall be no commissioning charges, however you shall arrange freeTo & Fro Air Ticket, lodging / boarding, and local conveyance for our Engineers during supervision of Installation of Gas Plant at site on free of cost basis. Our Engineers will be there for Supervision only. Any manpower / fitter required for installation work shall be provided by you.
3.	P&F	3% Extra.
4.	Freight	Extra at Actuals.
5.	Insurance	In your Scope.
6.	Payment Terms	50% Advance with your Prestegious Purchase Order and Balance against PI.
7.	Delivery	6-8 Weeks from the PO and Advance. Rest can be confirmed for Availability.
8.	Warranty	We hereby confirm that, our equipment shall have Suppliers warranty for a period of 12 months from the date of Commissioning or 18 months from date of Dispatch whichever is earlier.
9.	GST	As per the Commercial Table.
10.	Remarks	.

Hope you will find our offer in line with your requirement.

Should you require any further clarification/information, please feel free to contact us.

Thanking you, and assuring you of our best attention at all times.

Very Yours truly,

For Assam Bearing Pvt Ltd.

Shray Saboo

Director

9350193012

www.assambearing.in