Quotation No : Q25000283

Date : 17-Jul-2025

Ballestra Engineering and Projects Pvt Ltd.
No.69, Mezanine Floor, JP & Devi Jambukeshwara Arcade, Millers Road
BENGALURU
KARNATKA
560052

Kind Attention : Mr./Ms. Pradeep Kumar

Dear Sir,

We understand that in industry, reliability is not just a requirement,it is the foundation of success.
That is why Absstem Industrial PSA Generator is more than just a product; it is a commitment to excellence, efficiency, and uninterrupted performance.

Every component is designed with precision and innovation, ensuring that each molecule of oxygen and nitrogen is delivered with the utmost purity.

With fully automated operation, our system seamlessly integrates into your processes, reducing manual intervention and maximizing productivity.

Moreover, our industry-leading air ratio ensures that you achieve the highest efficiency, optimizing energy consumption while maintaining peak performance.
And because we believe in standing by our craftsmanship, we offer an unmatched-10 year warranty on sieves, giving you the peace of mind that your investment is protected for the long run.

We have attached the detailed quotation for your review.

Should you have any questions or require further customization to meet your specific needs, please do not hesitate to reach out.

We are here to provide not just a product but a solution that breathes life into your operations.

We look forward to the opportunity to serve you and build a lasting partnership.

Thanks and Regards,

For Absstem Industrial Solutions Pvt. Ltd.

Arifa Zaidi
Assistant Manager Business Development
9218108184
www.absstem.com


POWERED BY ABSSTEM INDUSTRIAL

Industrial

PSA Oxygen Generator



PSA Technology

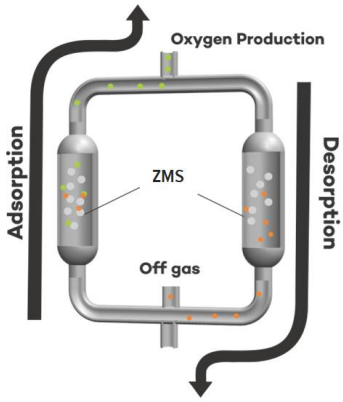

PSA Process explaining oxygen production

Industrial Oxygen Generator mainly consists of two adsorbers filled with zeolite molecular sieves. Pressurized air is passed through one of these adsorbers, zeolite having a property to attract nitrogen, adsorbs Nitrogen from air and oxygen is allowed to pass through and move into the storage tank as the final product. As the adsorber approaches saturation, the air is allowed to pass through the other adsorber while this adsorber is being regenerated to ensure a continuous supply of Oxygen. This changeover takes place through a specially designed microcontroller to ensure a hassle-free operation. The quality of oxygen produced is monitored by an Oxygen analyser.

Absstem Industrial solutions Pvt. Ltd.
Corporate Address: *Plot No. 591, Phase- IV, Sector 8, IMT Manesar, Gurugram, Haryana-122052*
Contact-1800 3010 3394, Email- Indsales@absstem.com
CIN -U29256HR2022PTC103387

Key Features

- Shipped ready for installation
- 5 minutes Startup time with uninterrupted stoppages.
- Quick & Easy installation
- Low operating costs compared to gas cylinders/liquid oxygen
- Reduced Maintenance costs
- Embedded Safety Interlocks to cater any abnormality.
- Space-saving compact design.
- Eliminates all safety hazards which are there with gas cylinder or liquid oxygen.
- 10 years warranty on molecular sieves.

Description

a. Product	Oxygen Gas Generator
b. Model	**IDOS**
c. Technology	PSA (Pressure Swing Adsorption)

Specifications

a.	Oxygen Flow Rate	As per Performance Sheet
b.	Oxygen Purity	As per Performance Sheet
c.	Oxygen Delivery Pressure	5.5 Barg (Higher Pressure Options Available)
d.	Ambient conditions	
	• Temperature	0 to 50 Deg. Celsius
	• Relative Humidity	up to 80 % (Max.)
	• Altitude	up to 1000 m above Sea level

Scheme Offered

This scheme will comprise of

- Air package
  (Air compressor, Air dryer, Air Receiver, Water Separator)
- Industrial Oxygen generator with oil removal filtration system
- Storage Tank
- Oxygen Analyzer
- Alarm panel

Unique Features of Absstem

a. All fabricated items are cleaned and degreased as per GEP standards.
b. All Instruments used are compatible with oxygen gas.
c. Guaranteed 10+ years of trouble free and reliable plant operation.
d. We provide the purest **Oxygen** in Industry.
e. Data logging and Graphical Reports for all parameters available.
f. Test certificates of all instruments are available on demand.


Absstem Industrial solutions Pvt. Ltd.
Corporate Address: *Plot No. 591, Phase- IV, Sector 8,*
IMT Manesar, Gurugram, Haryana-122052
Contact-1800 3010 3394, Email- Indsales@absstem.com
CIN -U29256HR2022PTC103387

Onsite Gas Generation vs Liquid Tank/Cylinder Alternative

Non-stop availability: 24 x 7 across 365 days in an year
Easy integration within existing installations
Your own independent supply source of industrial gas
Significant economies for scale and lower operational costs: no rental charges, logistical expenses and bulk user evaporation losses
No safety hazards related to handling high-pressure cylinders

Equipment Description

The Industrial Oxygen Generator consists of

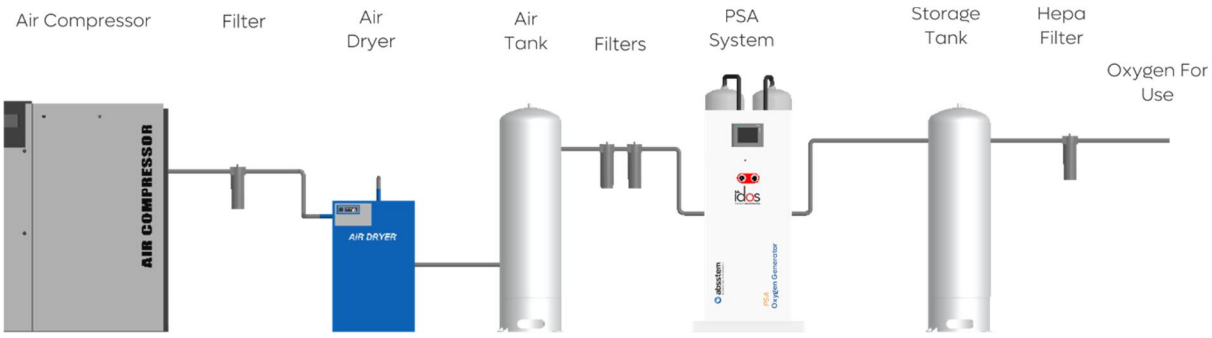

Air Compressor	An Air compressor is used to compress the atmospheric air to a pressure required for the separation of **oxygen** from the air.
Refrigerated Air Dryer	Compressed air then passes through a refrigerated dryer to remove moisture (which is harmful to sieves) from the air.
Air Receiver	Dry air is collected in an air tank to remove the pulsations which serve the dynamic (changing) requirement of air by the PSA system.
Multistage Filtration system	Before air enters the PSA system, it is passed through multistage filtration removing moisture, particulates and oil content to the specified levels.
PSA system	Pressurized air is passed through PSA Towers filled with Molecular sieves to separate **Oxygen** from Air.
Storage Tank	Industrial Grade **Oxygen** produced from IDOS is stored in this tank to supply a continuous flow of **Oxygen**.
Online Oxygen Analyzer	Online Oxygen analyzer for continuous monitoring of Oxygen purity level.


Absstem Industrial solutions Pvt. Ltd.
Corporate Address: *Plot No. 591, Phase- IV, Sector 8, IMT Manesar, Gurugram, Haryana-122052*
Contact-1800 3010 3394, Email- Indsales@absstem.com
CIN -U29256HR2022PTC103387

HD Touch Screen Display

(User-friendly touch screen interface for easy operation and maintenance)

Absstem industrial oxygen generator complies with all industry standards and regulation

- Alarm management system
- Plug and play
- Fully automatic
- Process data display
- Consumables running hours display
- Data logging via USB drive
- Graphical representation

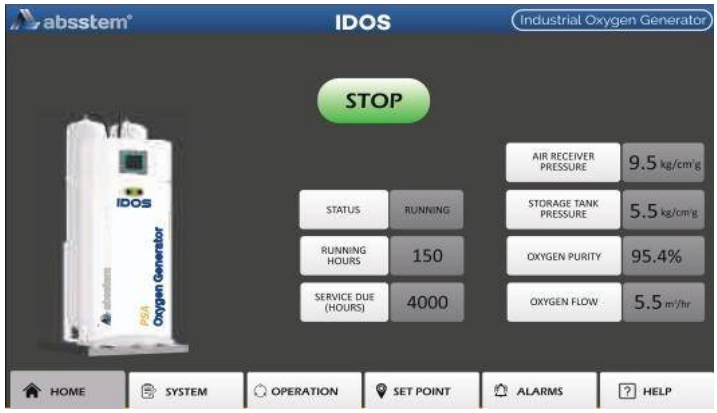

Additional upgrades

- Digital flow meter with totaliser
- High-pressure oxygen tank
- Oxygen booster for high pressure requirements
- Cylinder manifold and alarm management system
- Remote monitoring

Plant Operation

- Unit operates 24-hrs a day, 7-days a week throughout the year reliably, automatically & safely

Automation

- The Plant is fully automatic and needs only electrical power for running the Air compressor
- The machine automatically enters into standby mode when the level in the Storage Tank reaches a preset limit. This helps in optimised Air Compressor operation and reduced power consumption.

International Quality standards

A strict quality procedure, following the leading international pharmacopoeia and Industrial directives, is followed in the selection of all mechanical and electrical instruments, vessel fabrication and designing of Industrial oxygen generators.

Absstem Industrial solutions Pvt. Ltd.
Corporate Address: *Plot No. 591, Phase- IV, Sector 8, IMT Manesar, Gurugram, Haryana-122052*
Contact-1800 3010 3394, Email- Indsales@absstem.com
CIN -U29256HR2022PTC103387

Itemised Supply description

No.	Item description	Make	Qty
a	Air Compressor	Kaeser/IR/As per Demand	Client scope/ Quoted Separately
b	Refrigeration Dryer with pre filter	Kaeser/IR/As per Demand	Client scope/ Part of Compressor Package.
c	Air Tank	ABSSTEM	Client scope/ Part of Compressor Package.
d	Set of Filters	ABSSTEM	1 no.
e	PSA unit (IDOS)	ABSSTEM	1 no.
f	Electrical Power Panel with PLC and cabling	ABSSTEM & MITSUBISHI	1 no.
f	Digital Oxygen Analyzer	ABSSTEM	1 no.
g	Storage Tank	ABSSTEM	Quoted Separately.

Electrical Protection

The client should make proper arrangements for earthing/grounding systems for the Industrial **Oxygen** Generator at their facility.

Enclosure Panel

- Ergonomically designed metal enclosure with powder-coated finish for longer life.
- High-strength IP-rated panel fittings from Germany for a robust enclosure.
- Fan filters from Rittal are IP-55 rated making the electrical enclosure internal environment dust-free.
- Easy connectivity to any place of installation with req. port connections.
- High-strength base frame designed for higher load and easy transportation.
- Vessels are designed per ASME section VIII DIV I. Vessels are epoxy paint coated which is considered good for longevity and corrosion resistance.
- All electrical items are CE certified with operating voltage at 24 VDC

Maintenance Contract (AMC / CMC)

Our in-house service support packages Absstem Shield & Absstem Shield premium ensures 24*7 on site support for all scheduled and need based service requirements. Per the schedule mentioned in the operational manual, we suggest the user to change the filters by following a simple protocol.

Our technical experts are always available to guide your maintenance team for carrying out minor troubleshooting and basic maintenance activities via remote support program.

Best ROI Guaranteed

ROI within 6 to 18 months when compared to conventional methods

Generator performance depends on the component selection. Our processes make this job easier as all equipment is selected based on more than 3 decades of research. IDOS is a fully automatic (operator-free operation) that ensures peace of mind.

We deliver what we commit!!

Absstem Industrial solutions Pvt. Ltd.
Corporate Address: *Plot No. 591, Phase- IV, Sector 8, IMT Manesar, Gurugram, Haryana-122052*
Contact-1800 3010 3394, Email- Indsales@absstem.com
CIN -U29256HR2022PTC103387

Absstem Shield:

Premium Service Across India



Absstem Technologies, a leading gas technology provider and industrial and medical gas generator manufacturer has come up with a new initiative called **Absstem Shield**, under which Annual Maintenance Contracts (AMC) and Comprehensive Maintenance Contracts (CMC) will be offered for oxygen generators. Our Service Plans keep your nitrogen and oxygen generators in excellent shape.

Key Features

- Our AMC/CMC solutions work with **ANY** brand **PSA/VPSA Oxygen & Nitrogen** Generators
- We offer **on-site checkups** for your machines to access and understand your machine's requirement
- **CMC solutions** that look after your machines for as long as **10 years and beyond**
- **24 x 7** access to spare parts
- Quickest TAT (Turnaround time) in the industry.
- Constant touch of our team with your operator on **monthly** basis, ensuring highest uptime in the industry.
- Genuine spares with 6-month warranty
- We provide constant **monitoring** along with **monthly status updates**

Absstem Shield

Our in-house technical shield engineers are in constant contact with the operators every month making sure that the purity levels and output efficiencies are consistent with the requirement you've asked for. Our AMC plans work with ANY brand and either PSA or VPSA oxygen generators and PSA nitrogen generators. We make sure that every service during the AMC period is free-of-charge. If there is a need for part replacement, the only cost you would incur would be that of the spares. AMCs are open 24*7 and assure a timely service maintenance schedule. Our plans include AMCs that include constant monitoring, monthly status updates, on-site visits and one of the quickest turn-around times in the country.

Absstem Shield Premium

Our Comprehensive contracts include anything and everything that your gas generators would require to make sure the output and purity levels are consistent. The CMC plans work with ANY brand and include monthly routine check-ups, on-site deployment of our technical shield engineers, and replacement of consumables at no additional cost. As mentioned before, our CMC plans are open 24x7.

Corporate Address
Plot No. 591, Sector 8, Phase IV
IMT Manesar, Gurugram, Haryana - 122051
Work Address: Plot No. 222 & 223 Industrial Area
Puth Khurd, New Delhi, Delhi - 110039
Contact: 1800 3010 3394

Features	Shield	Shield Premium
Visit	✓	✓
Consumables	✗	✓
Flexible Payment Options	✓	✓
Genuine Parts	✓	✓
OTR (One-time Resolution)	✓	✓
Service History	✓	✓
24x7 Support	✓	✓
Training	✓	✓
Our Warranty on OEM equipment	✗	✓
Priority Status	✗	✓
Breakdown Visits	Limited	Unlimited
10-year warranty on Sieves	✓	✓

Terms And Conditions

- ### Our Responsibility

  - Check installation and ambient conditions.
  - Maintenance by service engineer based on checklist
  - Documentation of the maintenance results
  - Scheduling the maintenance dates.

- ### Client Responsibility

  - Repair and Maintenance carried out under this contract do not release the user from the prescribed operator level preventive control routines described in the service manual.
  - It is the user's responsibility to make the PSA plant available for preventive maintenance to Absstem Service Engineer on his scheduled visit. Otherwise, such a visit will be charged.
  - The suggestions/recommendations given by our service engineers from time to time on the operation of the PSA Gas Plant shall be implemented by the user.
  - It is the user's responsibility to arrange for inspection/maintenance/repair/ spare part of main incoming power, oxygen or nitrogen pipeline leakages or any other equipment beyond PSA Gas Plant maintained by supplier.

Corporate Address
Plot No. 591, Sector 8, Phase IV
IMT Manesar, Gurugram, Haryana - 122051
Work Address: Plot No. 222 & 223 Industrial Area
Puth Khurd, New Delhi, Delhi - 110039
Contact: 1800 3010 3394

- Conditions:

  - The Service contract does not apply to any damage caused due to mishandling, neglect, accident, improper application and any repair or maintenance done by an unauthorized person.
  - We are not liable for any damages arising from improper use of the equipment, or failure to follow adequate safety precautions.
  - Proper cleaning of the Air Compressor and PSA Gas Generator should be done as per the maintenance schedule provided to Client. If any damage or operation of equipment is affected due to not following the preventive maintenance schedule given to the Client.
  - Proper/continuous (without fluctuation) incoming power should be provided by the Client. Any equipment damaged due to power fluctuation is not covered under this contract.
  - Separate earthing for PSA Gas Plant and pipeline should be provided by the Hospital. If any equipment is damaged due to the non-availability of separate earthing would not be covered under CMC.
  - The Client should arrange for at least 48 hours of Gas backup after reporting the problem.
  - The service contract for PSA Gas Generators should not be broken under any condition. If the service contract is broken by the user, then the next contract would be made after inspection of the PSA Gas Generator (Chargeable). Any spares or maintenance required before the continuation of the maintenance contract should be done at extra costs if required and would be the sole decision of supplier. We are offering you service contract with an increment of 7% every year.
  - If any maintenance/repair of the PSA Gas Generator is done by an unauthorized person, Service Contract would be void with immediate effect. And another Contract needs to be done after inspection of the machine (chargeable) and it would be sole decision of supplier.
  - Any equipment not covered under contract but is a part of PSA Gas Generator, the supplier is not liable for any services however if required on sole discretion of supplier it can be done on chargeable basis.
  - 10 years warranty on sieves is only applicable if the equipment is covered under Absstem premium and Absstem Shield (recommended consumables are changed as per the schedule given by supplier).
  - Any damages incurred in major equipment due to shot circuit and malfunction are not covered such as motors, electricals and electronics etc.

A world-standard plan, with pan-India service.

Thank You

Corporate Address
Plot No. 591, Sector 8, Phase IV
IMT Manesar, Gurugram, Haryana - 122051
Work Address: Plot No. 222 & 223 Industrial Area
Puth Khurd, New Delhi, Delhi - 110039
Contact: 1800 3010 3394

Product Description

Product	Description	Make	Qty
Compressed Air System	C015F0094 Air System		1

Caption	Specification
Air Compressor KW	15 KW
Air Compressor Make	Atlas Copco/ Ingersoll Rand/ Gardner Denver/ As per Demand
Air Dryer	Included
Dry Air Storage	700 Liters Included
Interconnecting Piping	Included
Pre filter	Included
Dry Air Generated	94 CFM
Air Pressure	7.5 Barg
POWER SUPPLY	400 V 3 Phase 50 Hz

Product	Description	Make	Qty
IDOS Oxygen Generator	IDOS 09 B Oxygen		1

Caption	Specification
Gas Generated	Oxygen
Flow	9 Nm3/Hr
Purity	95 Percent
Compressor	In Your Scope / Quoted Separately
Dryer	In Your Scope / Part of Compressor Package
Air Vessel	In Your Scope / Part of Compressor Package
Dry Air Required	71 CFM
Power Required	230V 50 Hz Single Phase
Module Option	PSA Plant Only

Absstem Industrial Solutions Pvt. Ltd.
Ground Floor, Plot No. 591, Sector 8, Phase IV
IMT Manesar, Gurugram, Haryana - 122052
Contact: 1800 547 0506 | indsales@absstem.com
CIN: U29256HR2022PTC103387

Product	Description	Make	Qty
IDOS Gas Storage	IDOS 09 ST Oxygen		1

Caption	Specification
Water Volume	2000 Litres
Gas Stored	Oxygen
Gas Stored Volume	11 M3
Working Pressure	5.5 Barg
Hydrotest Pressure	9 Barg

Product	Description	Make	Qty
Service	SKID MOUNTING Absstem Shield		1

Caption	Specification
SKID TYPE	C Channel
SKID DIMENSIONS	8 Feet X 20 FEET

Commercial Offer

S No	Item Code	Item Name	Description	HSN	Qty	Unit Price	GST(%)	Amount
1	ACSC015F	C015F0094	Compressed Air System	840510	1	9,84,000.00	18.00	9,84,000.00
2	IDOS 09 B	IDOS 09 B	IDOS Oxygen Generator	842139	1	17,65,200.00	18.00	17,65,200.00
3	IDOS 09 ST	IDOS 09 ST	IDOS Gas Storage	842139	1	1,92,000.00	18.00	1,92,000.00
4	ABSKID-820	SKID MOUNTING	Service	73110090	1	4,30,000.00	18.00	4,30,000.00
							Sub Total	33,71,200.00
							GST(%) @18.00	6,06,816.00
							Grand Total ()	39,78,016.00

Absstem Industrial Solutions Pvt. Ltd.
Ground Floor, Plot No. 591, Sector 8, Phase IV
IMT Manesar, Gurugram, Haryana - 122052
Contact: 1800 547 0506 | indsales@absstem.com
CIN: U29256HR2022PTC103387

Terms And Conditions

1.	EXCLUSIONS & CLIENTS SCOPE	Civil work (concrete leveled floor), All Power Cables & Cabling out of battery limit , Unloading / Shifting of Gas Plant at Clients site will be in Client Scope.
2.	SUPERVISION OF ERECTION & COMMISSIONING	There shall be no commissioning charges, however you shall arrange freeTo & Fro Air Ticket, lodging / boarding, and local conveyance for our Engineers during supervision of Installation of Gas Plant at site on free of cost basis.
3.	P&F	3% Extra.
4.	Freight	Extra at Actuals.
5.	Insurance	In your Scope.
6.	Payment Terms	50% Advance with your Prestegious Purchase Order and Balance against PI.
7.	Delivery	12-16 Weeks from the PO and Advance. Rest can be confirmed for Availability.
8.	Warranty	We hereby confirm that, our equipment shall have Suppliers warranty for a period of 12 months from the date of Commissioning or 18 months from date of Dispatch whichever is earlier.
9.	GST	As per the Commercial Table.
10.	Remarks	.

Hope you will find our offer in line with your requirement.

Should you require any further clarification/information, please feel free to contact us.

Thanking you, and assuring you of our best attention at all times.

Very Yours truly,

For Absstem Industrial Solutions Pvt. Ltd.

Arifa Zaidi

Assistant Manager Business Development

9218108184

www.absstem.com