## Quotation No : Q24000364

Date : 01-Jul-2024

Calsonic Kansei Motherson Auto Products Private Limited
Plot no. A-4, SIPCOT Industrial Growth centre, Chengalpattu - Sriperumbudur Road, Oragadam
KANCHIPURAM
TAMILNADU

## Kind Attention : Mr./Ms. M. Sundarraji

Dear Sir,

We understand that in industry, reliability is not just a requirement,it is the foundation of success.
That is why Absstem Industrial PSA Generator is more than just a product; it is a commitment to excellence, efficiency, and uninterrupted performance.

Every component is designed with precision and innovation, ensuring that each molecule of oxygen and nitrogen is delivered with the utmost purity.

With fully automated operation, our system seamlessly integrates into your processes, reducing manual intervention and maximizing productivity.

Moreover, our industry-leading air ratio ensures that you achieve the highest efficiency, optimizing energy consumption while maintaining peak performance.
And because we believe in standing by our craftsmanship, we offer an unmatched-10 year warranty on sieves, giving you the peace of mind that your investment is protected for the long run.

We have attached the detailed quotation for your review.

Should you have any questions or require further customization to meet your specific needs, please do not hesitate to reach out.

We are here to provide not just a product but a solution that breathes life into your operations.

We look forward to the opportunity to serve you and build a lasting partnership.

Thanks and Regards,

## For Absstem Industrial Solutions Pvt. Ltd.


Pramod Kumar
Director
8447642325
www.absstem.com

nGEN POWERED BY ABSSTEM INDUSTRIAL

# Industrial PSA Nitrogen Generator




## PSA Technology

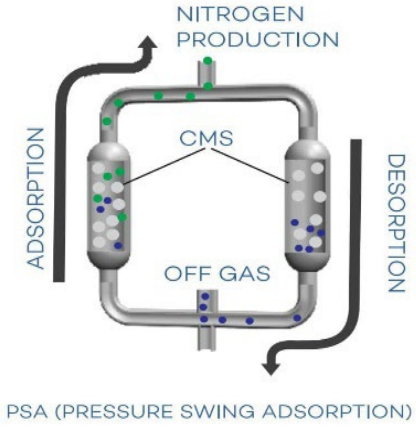


PSA (PRESSURE SWING ADSORPTION)

Industrial Nitrogen Generator mainly consists of two adsorbers filled with carbon molecular sieves. Pressurized air is passed through one of these adsorbers, carbon having the property to attract oxygen, adsorbs oxygen from air and Nitrogen is allowed to pass through and move into the storage tank as the final product. As the adsorber approaches saturation, the air is allowed to pass through the other adsorber while this adsorber is being regenerated to ensure a continuous supply of Nitrogen. This changeover takes place through a specially designed microcontroller to ensure a hassle-free operation. The quality of Nitrogen produced is monitored by a Nitrogen analyser.

## Key Features

- Shipped ready for installation
- 5 minutes to run and never have to stop it!
- Easy installation
- Low operating expenses compared to gas cylinders/liquid Nitrogen
- Maintenance costs are very less
- Embedded Safety Interlocks
- Space-saving design
- Eliminates all hazards which are there with gas cylinder or liquid Nitrogen
- Longevity: at least 10 years

**Absstem Industrial Solutions Pvt. Ltd.**
Plot No. 591, Sector 8, Phase IV
IMT Manesar, Gurugram, Haryana - 122051
Contact - 1800 3010 3394 Email - indsales@absstem.com
CIN: U29256HR2022PTC103387

## Description

| | | |
|---|---|---|
| a. | Product Name | Nitrogen Gas Generator |
| b. | Model Range | **NGEN** |
| | Technology | PSA (Pressure Swing Adsorption) |

## Specifications

| | | |
|---|---|---|
| **a.** | Nitrogen Flow Rate | As per Performance Sheet |
| **b.** | Nitrogen Purity | As per Performance Sheet |
| **c.** | Nitrogen Delivery Pressure | 5.5 Barg (Higher Pressure Options Available) |
| **d.** | Ambient conditions | |
| | Temperature | 0 to 50 Deg. Celsius |
| | Relative Humidity | up to 80 % (Max.) |
| | Altitude | up to 1000 m above Sea level |

## Scheme Offered – (PSA Only)

This scheme will comprise of

- Air package with inlet air filtration system
  (Air compressor, Air dryer, Water Separator, Oil filters)
- Industrial Nitrogen generator
- Storage Tank
- Nitrogen Analyzer
- Alarm panel

## Unique Features of Absstem

a. All the fabricated items are cleaned and degreased following our strict quality policy.
b. All the Instruments are specially manufactured to make them suitable for Nitrogen gas.
c. Guaranteed 10+ years of healthy life.
d. We provide the purest **Nitrogen** in Industry.
e. Data logging and Graphical Reports for all parameters available.
f. Test certificates of all instruments are available on demand.

## **Onsite Gas Generation** vs Liquid Tank/Cylinder Alternative


| |
|---|
| *Non-stop availability: 24 hours a day, 7 days a week* |
| *Easy integration within existing installations* |
| *Your own independent supply of industrial gas* |
| *Significant economies for scale and lower operational costs: no rental charges, logistical expenses and bulk user evaporation losses* |
| *No safety hazards when handling high-pressure cylinders* |



**Absstem Industrial Solutions Pvt. Ltd.**
Plot No. 591, Sector 8, Phase IV
IMT Manesar, Gurugram, Haryana - 122051
Contact - 1800 3010 3394 Email - indsales@absstem.com
CIN: U29256HR2022PTC103387

## Equipment Description

The Industrial Nitrogen Generator consists of

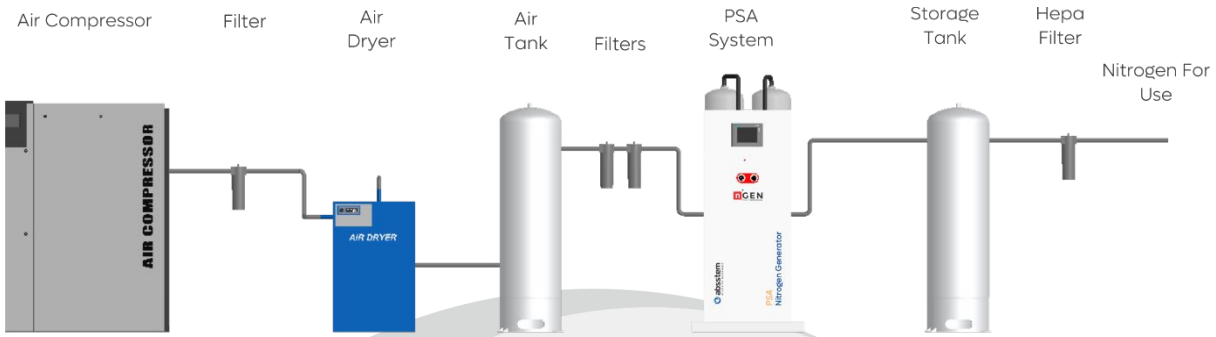


| | |
|---|---|
| Air Compressor | An Air compressor is used to compress the atmospheric air to a pressure required for the separation of **Nitrogen** from the air. |
| Refrigeration dryer | Compressed air then passes through a refrigerated dryer to remove moisture (which is harmful to sieves) from the air. |
| Air Tank | Dry air is collected in an air tank to remove the pulsations which serve the dynamic (changing) requirement of air by the PSA system. |
| Multistage Filtration system | Before air enters the PSA system, it is passed through multistage filtration removing moisture, particulates and oil content to the specified levels. |
| PSA system | Pressurized air is passed through PSA Towers filled with Molecular sieves to separate **Nitrogen** from Air. |
| Storage Tank | Industrial Grade **Nitrogen** produced from NGEN is stored in this tank to supply a continuous flow of **Nitrogen**. |
| Nitrogen Analyzer | Nitrogen produced is monitored by a **Nitrogen** analyser. In case, O2 purity goes below the specified level, it gives an alarm and switches it to vent mode. |

## HD Touch Screen Display

(User-friendly touchscreen interface for easy operation and maintenance)

Absstem industrial Nitrogen generator complies with all industry standards and regulation

- Alarm management system
- Plug and play
- Fully automatic
- Process data display
- Consumables running hours display
- Data logging via USB drive
- Graphical representation




**Absstem Industrial Solutions Pvt. Ltd.**
Plot No. 591, Sector 8, Phase IV
IMT Manesar, Gurugram, Haryana - 122051
Contact - 1800 3010 3394 Email - indsales@absstem.com
CIN: U29256HR2022PTC103387

## Additional upgrades

- Digital flow meter with totaliser
- High-pressure Nitrogen tank
- Cylinder manifold and alarm management system
- Remote monitoring

## Plant Operation

- Unit operates 24-hrs a day, 7-days a week reliably, automatically & safely

## Automation

- The Plant is fully automatic and needs only electrical power for running the Air compressor
- The machine automatically enters into standby mode when the level in the Storage Tank reaches its set limit. This helps to increase the life of the Air compressor.

## International Quality standards

A strict quality procedure, following the leading international pharmacopoeia and Industrial directives, is followed in the selection of all mechanical and electrical instruments, vessel fabrication and designing of Industrial Nitrogen generators.

## Itemised Supply Description

| No. | Item description | Make | Qty |
|---|---|---|---|
| a | Air Compressor with Filters | ABSSTEM APPROVED | Quoted Separately |
| b | Refrigeration Dryer | ABSSTEM APPROVED | Quoted Separately |
| c | Air Tank | ABSSTEM | Quoted Separately |
| d | Set of Filters | ABSSTEM | 1 no. |
| e | PSA unit (NGEN) | ABSSTEM | 1 no. |
| f | Electrical Power Panel with PLC and all cabling | ABSSTEM & MITSUBISHI | 1 no. |
| f | Digital Nitrogen Analyzer | ABSSTEM | 1 no. |
| g | Storage Tank | ABSSTEM | Quoted Separately |
| h | Outlet product gas Filter | ABSSTEM | 1 no. |



**Absstem Industrial Solutions Pvt. Ltd.**
Plot No. 591, Sector 8, Phase IV
IMT Manesar, Gurugram, Haryana - 122051
Contact - 1800 3010 3394 Email - indsales@absstem.com
CIN: U29256HR2022PTC103387

## Electrical Protection

The client should make proper arrangements for earthing/grounding systems for the Industrial **Nitrogen** Generator at their facility.

## Enclosure Panel

- Ergonomically designed metal enclosure with powder-coated finish for longer life.
- High-strength IP-rated panel fittings from Germany for a robust enclosure.
- Fan filters from **Rittal** are IP-55 rated making the electrical enclosure's internal environment dust-free.
- Easy connectivity to any place of installation with req. port connections.
- High-strength base frame designed for higher load and easy transportation.
- Vessels are designed per ASME section VIII DIV I. Vessels are epoxy paint coated which is considered good for longevity and corrosion resistance.
- All electrical items are CE certified with operating voltage at 24 VDC

## Annual Maintenance Contract (AMC)

Our in-house support Absstem shield is 24*7 open and we assure a timely service maintenance schedule. Per the schedule mentioned in the operational manual, we suggest the operator change the filters by following a simple protocol.

It is very easy to change or replace as our commissioning engineer plus our commissioning engineer and tech support office will always guide you about the activity.

## Best ROI Guaranteed

***ROI within 6 to 18 months when compared to conventional methods***

Generator performance depends on the component selection. Our processes make this job easier as all equipment is selected based on more than 3 decades of research. NGEN is a fully automatic (operator-free operation) that ensures peace of mind.

# We deliver what we commit!!

Thank You



**Absstem Industrial Solutions Pvt. Ltd.**
Plot No. 591, Sector 8, Phase IV
IMT Manesar, Gurugram, Haryana - 122051
Contact - 1800 3010 3394 Email - indsales@absstem.com
CIN: U29256HR2022PTC103387

# Absstem Shield:

# Premium Service Across India




Absstem Technologies, a leading gas technology provider and industrial and medical gas generator manufacturer has come up with a new initiative called **Absstem Shield**, under which Annual Maintenance Contracts (AMC) and Comprehensive Maintenance Contracts (CMC) will be offered for oxygen generators. Our Service Plans keep your nitrogen and oxygen generators in excellent shape.

## Key Features

- Our AMC/CMC solutions work with **ANY** brand **PSA/VPSA Oxygen & Nitrogen** Generators
- We offer **on-site checkups** for your machines to access and understand your machine's requirement
- **CMC solutions** that look after your machines for as long as **10 years and beyond**
- **24 x 7** access to spare parts
- Quickest TAT ( Turnaround time) in the industry.
- Constant touch of our team with your operator on **monthly** basis, ensuring highest uptime in the industry.
- Genuine spares with 6-month warranty
- We provide constant **monitoring** along with **monthly status updates**

## Absstem Shield

Our in-house technical shield engineers are in constant contact with the operators every month making sure that the purity levels and output efficiencies are consistent with the requirement you've asked for. Our AMC plans work with ANY brand and either PSA or VPSA oxygen generators and PSA nitrogen generators. We make sure that every service during the AMC period is free-of-charge. If there is a need for part replacement, the only cost you would incur would be that of the spares. AMCs are open 24*7 and assure a timely service maintenance schedule. Our plans include AMCs that include constant monitoring, monthly status updates, on-site visits and one of the quickest turn-around times in the country.

## Absstem Shield Premium

Our Comprehensive contracts include anything and everything that your gas generators would require to make sure the output and purity levels are consistent. The CMC plans work with ANY brand and include monthly routine check-ups, on-site deployment of our technical shield engineers, and replacement of consumables at no additional cost. As mentioned before, our CMC plans are open 24x7.

**Corporate Address**
Plot No. 591, Sector 8, Phase IV
IMT Manesar, Gurugram, Haryana - 122051
**Work Address:** Plot No. 222 & 223 Industrial Area
Puth Khurd, New Delhi, Delhi - 110039
Contact: 1800 3010 3394

| Features | Shield | Shield Premium |
|---|---|---|
| Visit | ✓ | ✓ |
| Consumables | ✗ | ✓ |
| Flexible Payment Options | ✓ | ✓ |
| Genuine Parts | ✓ | ✓ |
| OTR (One-time Resolution) | ✓ | ✓ |
| Service History | ✓ | ✓ |
| 24x7 Support | ✓ | ✓ |
| Training | ✓ | ✓ |
| Our Warranty on OEM equipment | ✗ | ✓ |
| Priority Status | ✗ | ✓ |
| Breakdown Visits | Limited | Unlimited |
| 10-year warranty on Sieves | ✓ | ✓ |

## Terms And Conditions

- ### Our Responsibility

  - Check installation and ambient conditions.
  - Maintenance by service engineer based on checklist
  - Documentation of the maintenance results
  - Scheduling the maintenance dates.

- ### Client Responsibility

  - Repair and Maintenance carried out under this contract do not release the user from the prescribed operator level preventive control routines described in the service manual.
  - It is the user's responsibility to make the PSA plant available for preventive maintenance to Absstem Service Engineer on his scheduled visit. Otherwise, such a visit will be charged.
  - The suggestions/recommendations given by our service engineers from time to time on the operation of the PSA Gas Plant shall be implemented by the user.
  - It is the user's responsibility to arrange for inspection/maintenance/repair/ spare part of main incoming power, oxygen or nitrogen pipeline leakages or any other equipment beyond PSA Gas Plant maintained by supplier.



**Corporate Address**
Plot No. 591, Sector 8, Phase IV
IMT Manesar, Gurugram, Haryana - 122051
**Work Address:** Plot No. 222 & 223 Industrial Area
Puth Khurd, New Delhi, Delhi - 110039
Contact: 1800 3010 3394

- Conditions:

  - The Service contract does not apply to any damage caused due to mishandling, neglect, accident, improper application and any repair or maintenance done by an unauthorized person.
  - We are not liable for any damages arising from improper use of the equipment, or failure to follow adequate safety precautions.
  - Proper cleaning of the Air Compressor and PSA Gas Generator should be done as per the maintenance schedule provided to Client. If any damage or operation of equipment is affected due to not following the preventive maintenance schedule given to the Client.
  - Proper/continuous (without fluctuation) incoming power should be provided by the Client. Any equipment damaged due to power fluctuation is not covered under this contract.
  - Separate earthing for PSA Gas Plant and pipeline should be provided by the Hospital. If any equipment is damaged due to the non-availability of separate earthing would not be covered under CMC.
  - The Client should arrange for at least 48 hours of Gas backup after reporting the problem.
  - The service contract for PSA Gas Generators should not be broken under any condition. If the service contract is broken by the user, then the next contract would be made after inspection of the PSA Gas Generator (Chargeable). Any spares or maintenance required before the continuation of the maintenance contract should be done at extra costs if required and would be the sole decision of supplier. We are offering you service contract with an increment of 7% every year.
  - If any maintenance/repair of the PSA Gas Generator is done by an unauthorized person, Service Contract would be void with immediate effect. And another Contract needs to be done after inspection of the machine (chargeable) and it would be sole decision of supplier.
  - Any equipment not covered under contract but is a part of PSA Gas Generator, the supplier is not liable for any services however if required on sole discretion of supplier it can be done on chargeable basis.
  - 10 years warranty on sieves is only applicable if the equipment is covered under Absstem premium and Absstem Shield (recommended consumables are changed as per the schedule given by supplier).
  - Any damages incurred in major equipment due to shot circuit and malfunction are not covered such as motors, electricals and electronics etc.

A world-standard plan, with pan-India service.

Thank You



**Corporate Address**
Plot No. 591, Sector 8, Phase IV
IMT Manesar, Gurugram, Haryana - 122051
**Work Address:** Plot No. 222 & 223 Industrial Area
Puth Khurd, New Delhi, Delhi - 110039
Contact: 1800 3010 3394

# Product Description

| Product | Description | Make | Qty |
|---|---|---|---|
| nGen Air Package | nGEN 110 CP<br>Nitrogen | | 1 |

| Caption | Specification |
|---|---|
| Air Compressor KW | 90 KW |
| Air Compressor Make | Atlas Copco/ Ingersoll Rand/ Gardner Denver/ As per Demand |
| Air Dryer | Included |
| Dry Air Storage | Included |
| Interconnecting Piping | Included |
| Pre filter | Included |
| Dry Air Generated | 602 CFM |

| Product | Description | Make | Qty |
|---|---|---|---|
| nGen Nitrogen Generator | nGEN 110 P<br>Nitrogen | | 1 |

| Caption | Specification |
|---|---|
| Gas Generated | Nitrogen |
| Gas Pressure | upto 6.5 Barg( Higher options Available) |
| Flow @ 99.99 % | 165 Nm3/hr |
| Flow @ 99.995 % | 124 Nm3/hr |
| Flow @ 99.999 % | 93 Nm3/hr |
| Flow @ 99.9995 % | 75 Nm3/hr |
| Compressed Air Requirement | 602 CFM |
| Module | High Purity PSA system Only |
| Air Compressor And Drier | In your Scope / Quoted Separately |



**Absstem Industrial Solutions Pvt. Ltd.**
Ground Floor, Plot No. 591, Sector 8, Phase IV
IMT Manesar, Gurugram, Haryana - 122052
**Contact**: 1800 547 0506 | indsales@absstem.com
**CIN**: U29256HR2022PTC103387

| Product | Description | Make | Qty |
|---|---|---|---|
| nGen Gas Storage | nGEN 110 ST<br>Nitrogen | | 1 |

| Caption | Specification |
|---|---|
| Water Volume | 15000 Liters |
| Gas Stored | Nitrogen |
| Gas Stored Volume | 97.5 M3 |
| Working Pressure | 6.5 Barg |
| Hydrotest Pressure | 9 Barg |

| Product | Description | Make | Qty |
|---|---|---|---|
| Lubricated Booster | IR-7T4X5<br>Booster | ABSSTEM | 1 |

| Caption | Specification |
|---|---|
| Gas To be Compressed | Nitrogen |
| Suction Pressure | 3 to 4 Barg |
| Discharge Pressure | 20 to 55 Barg |
| Motor Rating | 3.75 KW |
| Voltage | 415 VAC |
| Gas Flow | 10 to 20 Nm3/hr |
| Type | Air Cooled Lubricated Reciprocating Booster |

| Product | Description | Make | Qty |
|---|---|---|---|
| Spares | Gas Storage 500 ltr 50 Barg<br>Absstem Shield | ABSSTEM | 1 |

| Caption | Specification |
|---|---|
| Volume | 500 Ltr |
| Pressure | 50 Barg |

## Commercial Offer

| S No | Item Code | Item Name | Description | HSN | Qty | Unit Price | GST(%) | Amount |
|---|---|---|---|---|---|---|---|---|
| 1 | nGEN 110 CP | nGEN 110 CP | nGen Air Package | 840510 | 1 | 40,20,000.00 | 18.00 | 40,20,000.00 |



**Absstem Industrial Solutions Pvt. Ltd.**
Ground Floor, Plot No. 591, Sector 8, Phase IV
IMT Manesar, Gurugram, Haryana - 122052
**Contact**: 1800 547 0506 | indsales@absstem.com
**CIN**: U29256HR2022PTC103387

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| 2 | nGEN 110 P | nGEN 110 P | nGen Nitrogen Generator | 840510 | 1 | 53,82,000.00 | 18.00 | 53,82,000.00 |
| 3 | nGEN 110 ST | nGEN 110 ST | nGen Gas Storage | 840510 | 1 | 12,00,000.00 | 18.00 | 12,00,000.00 |
| 4 | IR-7T4X5 | IR-7T4X5 | Lubricated Booster | 8414 | 1 | 3,60,000.00 | 18.00 | 3,60,000.00 |
| 5 | GR500 | Gas Storage 500 ltr 50 Barg | Spares | 8414 | 1 | 2,70,000.00 | 18.00 | 2,70,000.00 |

| | |
|---|---|
| Sub Total | 1,12,32,000.00 |
| GST(%) @18.00 | 20,21,760.00 |
| Grand Total () | 1,32,53,760.00 |



**Absstem Industrial Solutions Pvt. Ltd.**
Ground Floor, Plot No. 591, Sector 8, Phase IV
IMT Manesar, Gurugram, Haryana - 122052
**Contact**: 1800 547 0506 | indsales@absstem.com
**CIN**: U29256HR2022PTC103387

# Terms And Conditions

| | | |
|---|---|---|
| 1. | EXCLUSIONS & CLIENTS SCOPE | All erection / civil work, All Power Cables & Cabling out of battery limit of PSA Plant, Cable Trenches etc. Unloading / Shifting of Gas Plant at Clients site will be in Client Scope. Additional gas piping, cooling water (if required). |
| 2. | SUPERVISION OF ERECTION & COMMISSIONING | There shall be no commissioning charges, however you shall arrange freeTo & Fro Air Ticket, lodging / boarding, and local conveyance for our Engineers during supervision of Installation of Gas Plant at site on free of cost basis. Our Engineers will be there for Supervision only. Any manpower / fitter required for installation work shall be provided by you. |
| 3. | P&F | 3% Extra. |
| 4. | Freight | Extra at Actuals. |
| 5. | Insurance | In your Scope. |
| 6. | Payment Terms | 50% Advance with your Prestegious Purchase Order and Balance against PI. |
| 7. | Delivery | 6-8 Weeks from the PO and Advance. Rest can be confirmed for Availability. |
| 8. | Warranty | We hereby confirm that, our equipment shall have Suppliers warranty for a period of 12 months from the date of Commissioning or 18 months from date of Dispatch whichever is earlier. |
| 9. | GST | As per the Commercial Table. |
| 10. | Remarks | . |

Hope you will find our offer in line with your requirement.

Should you require any further clarification/information, please feel free to contact us.

Thanking you, and assuring you of our best attention at all times.

Very Yours truly,

For Absstem Industrial Solutions Pvt. Ltd.

Pramod Kumar

Director

8447642325

www.absstem.com